

# M7325 SERIES

MINIATURE, HIGH DENSITY,  
SINGLE OUTPUT,  
DC/DC CONVERTERS  
(UP TO 500W)



## Applications

Military (Airborne, ground-fix, shipboard), Ruggedized, Telecom, Industrial

## Special Features

- Miniature size
- High efficiency
- Wide input range
- Very Low output impedance (Typical: 50 mΩ@ 28V output)
- Input / Output isolation
- Remote sense
- More than 40db ripple reduction.
- Parallel connection with current share
- External On/Off Inhibit
- Fixed switching frequency (250 KHz)
- External synchronization capability
- EMI/RFI filters included
- Indefinite short circuit protection with auto-recovery
- Over-voltage shutdown with auto-recovery
- Over temperature shutdown with auto-recovery

## Electrical Specifications

### DC Input:

DC Input range: 18 to 48 V<sub>DC</sub>, per MIL-STD-704E.  
No damage for:  
MIL-STD-1275A (100V for 50mSec)  
MIL-STD-704A (80V for 0.1 Sec)

### Line/Load regulation:

Less than 1% (no load to full load, -55°C to +85°C).

### Ripple and Noise:

Less than 50mVp-p, typical (max. 1%) without external capacitance. When connected to system capacitance ripple drops significantly.

### DC Output:

Output range – 3.3V to 50V  
Output power – 450W (peak 500W)  
Output current – max 21A.

### Efficiency :

76-86% - Typical 85% (full load, room temperature)

### Load Transient Overshoot and undershoot

Output resistance at load change of 10%-100% is 20-50 mΩ (depending on output voltage). Output back to steady stated within 50-100μSec

### Isolation:

200V between Input and Output  
200V between Input and Case  
100V between Output and Case

### EMI/RFI:

Design to meet or exceed MIL-STD-461C CE03, CE07, CS01, CS02, CS06, RE02, RS02, RS03

### Ripple Reduction

More than 40db ripple reduction between input and output.

### Turn on Transient

No turn on transient.

## Protections \*

### Input

- **Inrush Current Limiter** – peak value of 5 x I<sub>in</sub> for less than 50μSec.
- **Under voltage protection** – unit protects itself (no damage) below 16.5Vdc.
- **Over voltage protection** – unit protects itself (no damage) above 52Vdc

### Output

- **Electronic over voltage protection** – Internal control protects unit (no damage) 10% above nominal voltage.
- **Passive tranzorb on outputs** – 20% above nominal voltage.
- **Current limiting** – Continuous protection (10-30% above maximum current) for unlimited time (Hiccup).

### General

- **Over temperature protection:** Shutdown at base plate temperature of +105°C (±5°C) Automatic recovery at base plate temperature lower than +95°C (±5°C)

\* Thresholds and protections can be modified / removed – please consult factory.

### **Environmental**

Design to Meet MIL-STD-810F

#### **Temperature:**

Operating: -55°C to +85°C  
(base plate)

Storage: -55°C to +125°C

#### **Humidity:**

Method 507.4 - Up to 95%.

#### **Altitude:**

Method 500.4, Procedure I & II, 40,000  
ft. and 70,000 ft. Operational

#### **Vibration and Shock:**

Shock - Saw-tooth, 20g peak, 11mS.

Vibration - Figure 514.5C-17. General  
minimum integrity exposure. (1 hour per  
axis.)

#### **Salt Fog:**

Method 509-4

#### **Reliability**

150,000 hours, calculated per

MIL-STD-217F at +85°C base plate,  
Ground fixed.

### **Environmental Stress Screening (ESS)**

Including random vibration and thermal cycles is also available. **Please consult factory for details.**

## Pin Assignment

Pin Numbers	Pin Assignment
15,16,17,18, 33,34,35,36	+ VIN
11,12,13,14, 29,30,31,32	- VIN
9	Input SIG. RTN
8	INHIBIT IN
27	INHIBIT OUT
10	SYN. IN

Pin Numbers	Pin Assignment
1, 2, 3,4, 19,20,21	+ VOUT
5,6,7,22, 23,24,25	- VOUT
26	+ VOUT Sense
28	- VOUT Sense

\* All output parallel pins should be connected together for best performance.

## Functions and Signals

### INHIBIT IN signal

The INHIBIT signal is used to turn the power supply ON and OFF.

TTL “1” or OPEN – will turn on the power supply. (For normal operation leave the signal not connected.)

TTL “0” – will turn off the power supply.

### SYNC signal

The SYNC IN signal is used to allow the power supply frequency to sync with the system frequency. The system frequency should be 250Khz  $\pm$  10Khz.

When not connected, the power supply will work at ~250KHZ

### INHIBIT OUT signal

Used when connecting two units or more in parallel. (Please consult factory)

The signal is to be connected to the INHIBIT IN signal of the slave unit (see diagram below). The signal synchronizes the shutdown and startup of the units.

Note: During parallel connection, output voltage may drop by 1-2%.

### INPUT SIGNAL RTN

The INPUT SIGNAL RTN is referred to the input.

This is used as grounding for SYNC, INHIBIT IN and INHIBIT OUT signals.


### VOUT SENSE

The SENSE is used to achieve accurate load regulations at load terminals (this is done by connecting the pins directly to the load’s terminals).


The use of remote sense has a limit of voltage dropout between converter’s output and load terminals of 2-10% of voltage output.

When not used connect +VOUT SENSE (Pin #26) to +VOUT (Pin #1, 2, 3,4, 19,20,21) and –VOUT SENSE (Pin #28) to –VOUT (Pin #5,6,7,22, 23,24,25)


## Typical connection

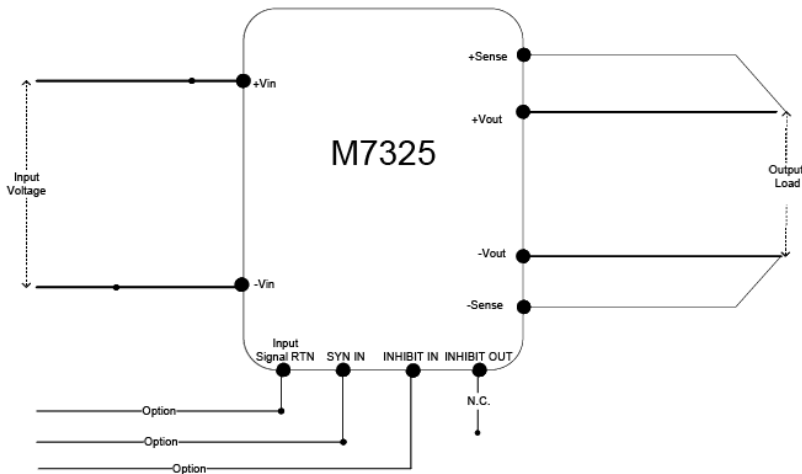


## Parallel connection

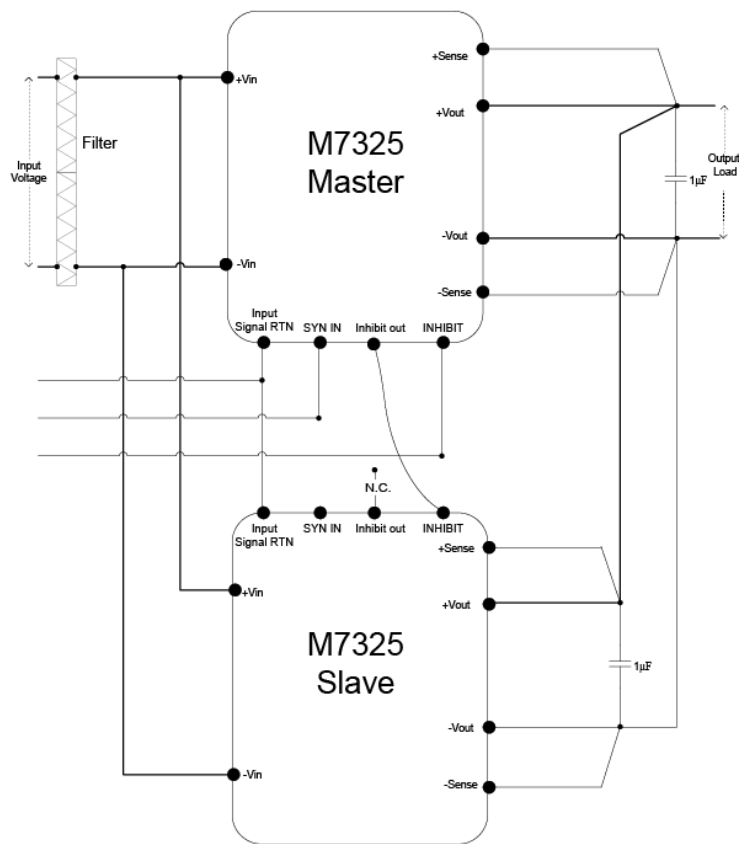

## Outline Drawing

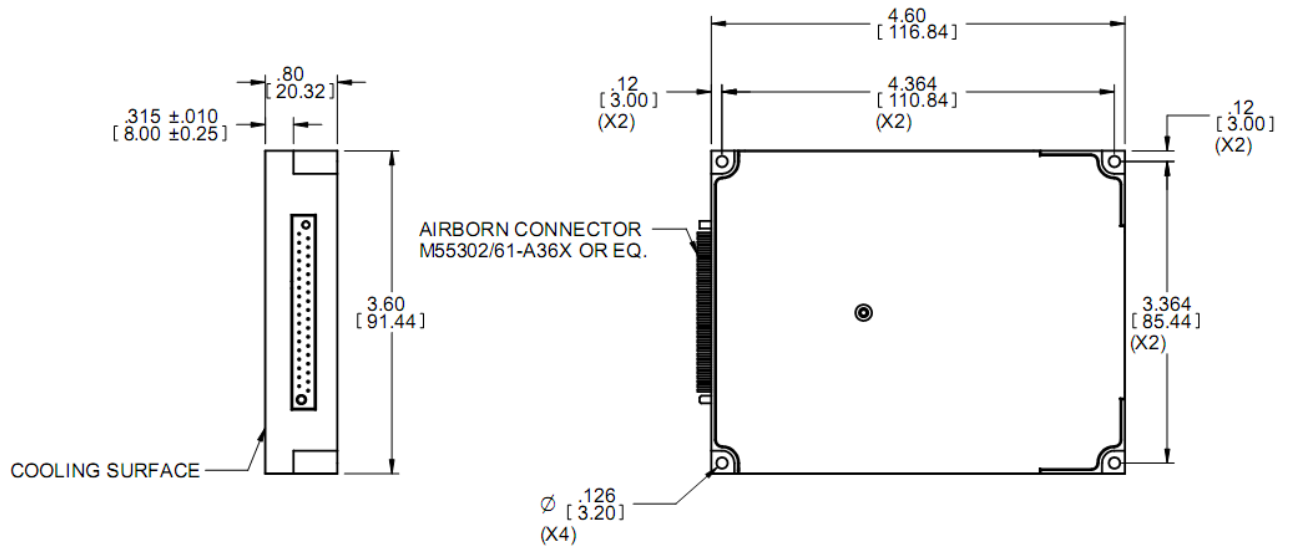

## Heat Dissipation Surface

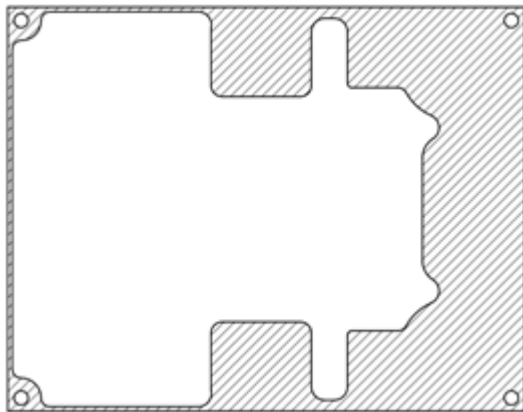

Dissipation Area  
6.0515 in<sup>2</sup>  
(3904 mm<sup>2</sup>)

### Notes

1. Dimensions are in Inches [mm]
2. Tolerance is:  
.XX ±0.01 IN  
.XXX ±0.005 IN
3. Weight: Approx. 360gr (12.7 Oz)
4. Mounting holes can be modified – please consult factory.
5. Parasolide 3D module is available for download on site.

\* Specifications are subject to change without prior notice by the manufacturer